

*Transfert*

FLEXIBLE FÖRDERGERÄTE *ED/EC*

FLEXIBLE MECHANICAL LOADER *ED/EC*




**TYPE ED**



**TYPE EC**



LEISTUNG VON 25 bis 4000 kg/h

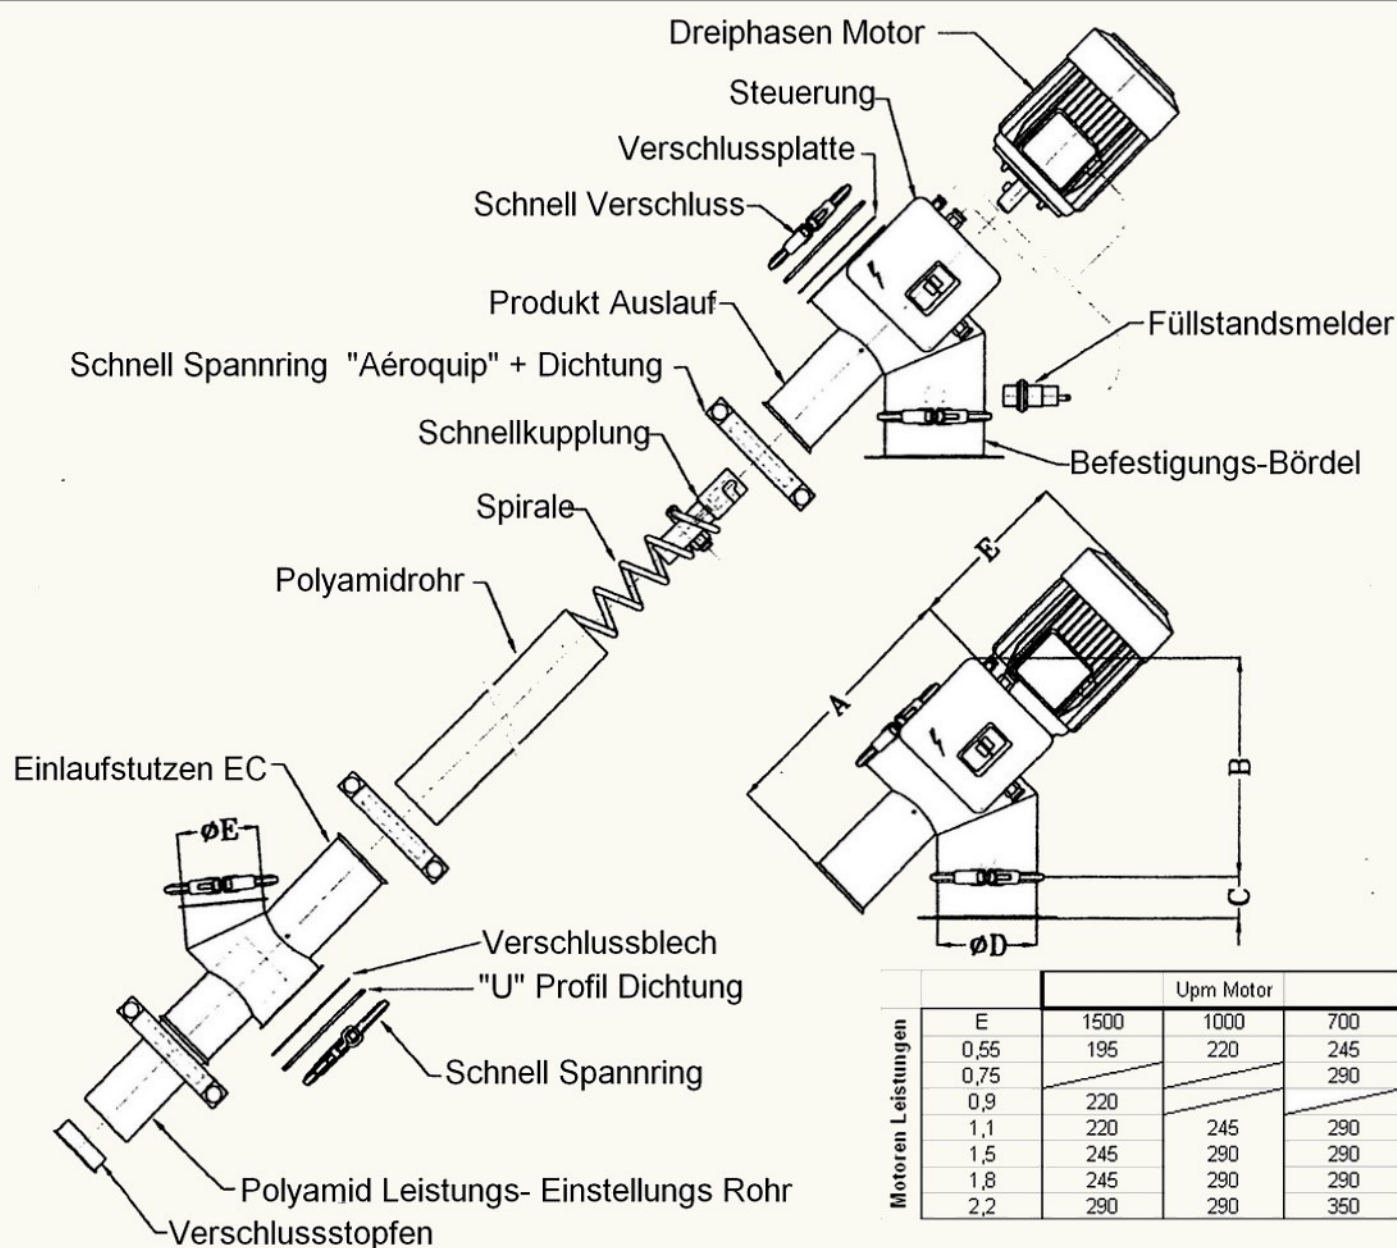



| Motoren Leistungen | Upm Motor |      |      |     |
|--------------------|-----------|------|------|-----|
|                    | E         | 1500 | 1000 | 700 |
| 0,55               | 195       | 220  | 245  |     |
| 0,75               |           |      |      | 290 |
| 0,9                | 220       |      |      |     |
| 1,1                | 220       |      | 245  | 290 |
| 1,5                | 245       |      | 290  | 290 |
| 1,8                | 245       |      | 290  | 290 |
| 2,2                | 290       |      | 290  | 350 |

| TYP | A   | B   | C  | øD  | øE  | Bei Länge | Motor Leistung (1500 Upm - 50Hz ) |          |      |    |
|-----|-----|-----|----|-----|-----|-----------|-----------------------------------|----------|------|----|
| E33 | 280 | 230 | 60 | 100 | 120 | <         | 10 M.                             | Leistung | 0,55 | kW |
| E43 | 280 | 230 | 60 | 100 | 120 | <         | 6 M.                              | Leistung | 0,55 | kW |
|     |     |     |    |     |     | >         | 9 M.                              |          | 0,9  | kW |
| E51 | 350 | 270 | 60 | 120 | 120 | <         | 8 M.                              | Leistung | 0,9  | kW |
|     |     |     |    |     |     | >         | 7 M.                              |          | 1,5  | kW |
| E63 | 350 | 270 | 60 | 120 | 120 | <         | 6 M.                              | Leistung | 0,9  | kW |
|     |     |     |    |     |     | >         | 7 M.                              |          | 1,5  | kW |
| E80 | 350 | 270 | 60 | 120 | 120 | <         | 7 M.                              | Leistung | 1,5  | kW |
|     |     |     |    |     |     | >         | 6 M.                              |          | 2,2  | kW |
| E90 | 380 | 280 | 60 | 150 | 150 | <         | 7 M.                              | Leistung | 1,5  | kW |
|     |     |     |    |     |     | >         | 6 M.                              |          | 2,2  | kW |

VOLUMEN VON 56 DM<sup>3</sup> BIS 364 DM<sup>3</sup>

**KC40 - KC50 - KC60**

**KC125 - KC250 - KC360**

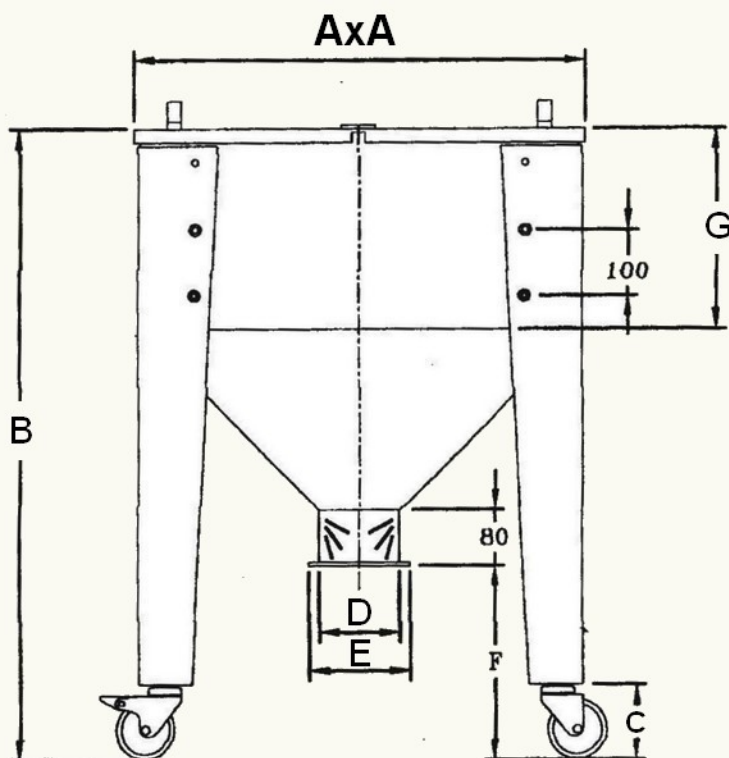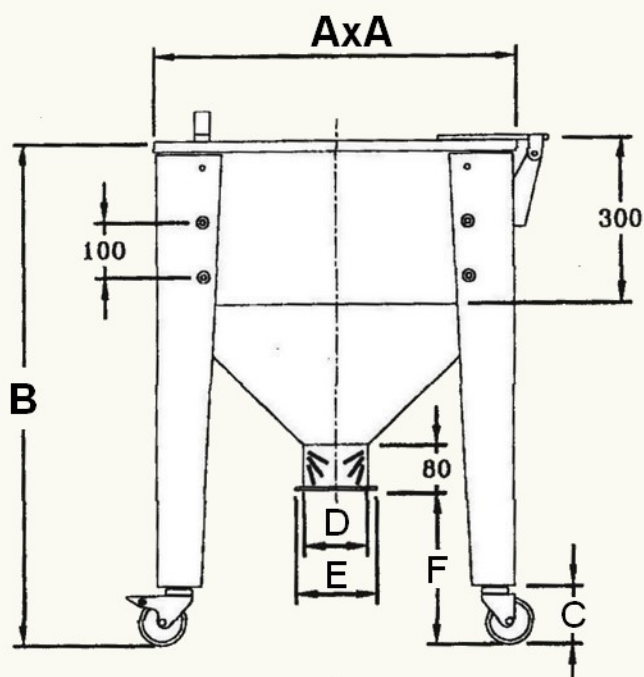

| TYP   | VOLUMEN            | A    | B    | C    | øD   | øE   | F    | G    |
|-------|--------------------|------|------|------|------|------|------|------|
|       | (dm <sup>3</sup> ) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |
| KC40  | 58                 | 410  | 825  | 100  | 120  | 134  | 305  | 300  |
| KC50  | 75                 | 460  | 825  | 100  | 120  | 134  | 280  | 300  |
| KC60  | 96                 | 510  | 825  | 100  | 120  | 134  | 255  | 300  |
| KC125 | 171                | 660  | 950  | 125  | 120  | 134  | 305  | 300  |
| KC250 | 364                | 910  | 1120 | 125  | 120  | 134  | 350  | 300  |
| KC360 | 464                | 910  | 1300 | 125  | 120  | 134  | 300  | 300  |

